

# YOUR LOGO

Your Company Street Address • phone: 000.000.0000 • fax: 000.000.000 • www.yourwebsite.com

## Technical Product Specifications



### Upward Exhaust

#### MODEL 425

2x6 wall (SKU 677-0253)

#### MODEL 350

2x4 wall (SKU 677-0251)

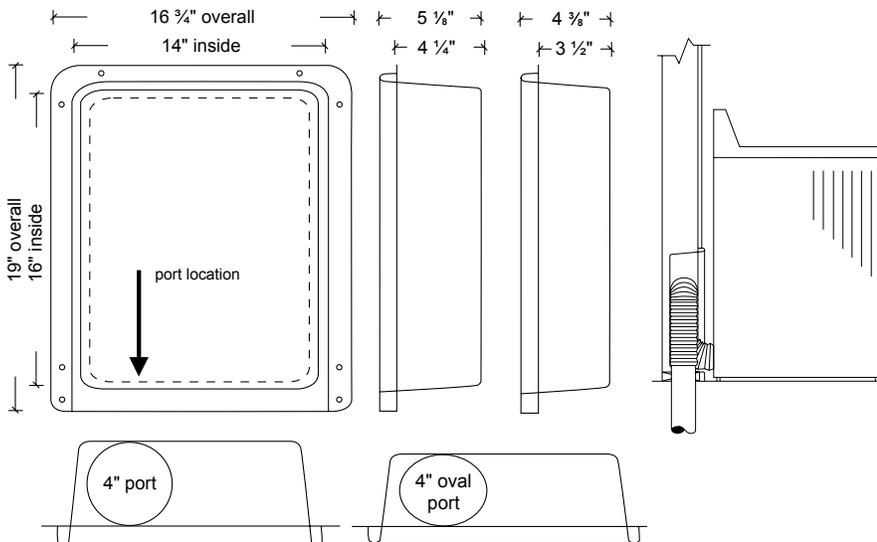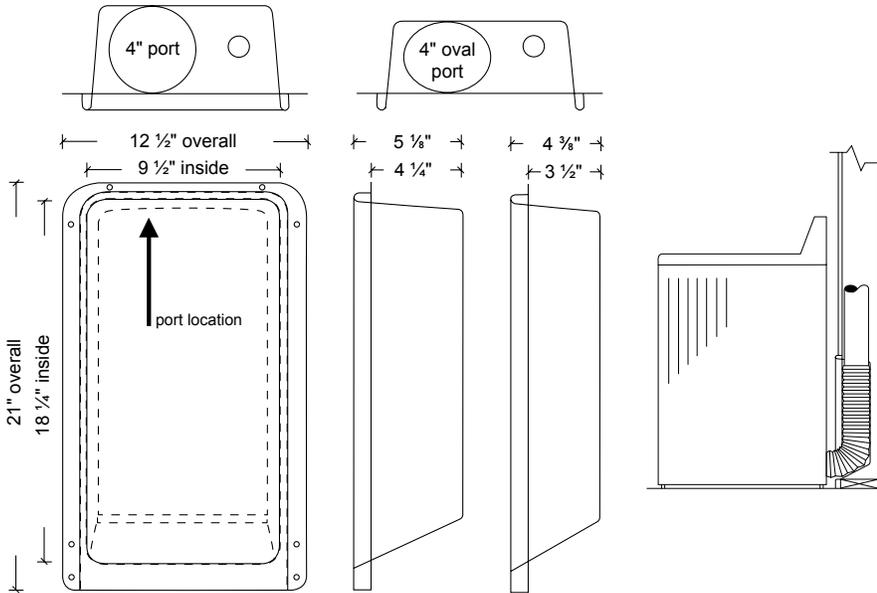

### Downward Exhaust

#### MODEL 4D

2x6 wall (SKU 677-0254)

#### MODEL 3D

2x4 wall (SKU 677-0252)

SKU Number	Model Number	Wall Size	Exhaust Direction
your sku	DB425	2x6	Upward
your sku	DB350	2x4	Upward
your sku	DB4D	2x6	Downward
your sku	DB3D	2x4	Downward

### Performance Data

**the dryerbox**

#### For Use:

- Dryer vent hose receptacle
- Doubles as gas connection receptacle
- Meets code requirements as a clean-out

#### Materials:

- Model 425 and 350 deep drawn with .028 aluminized steel (22 gauge)
- Model 4D and 3D deep drawn with .031 aluminized steel (21 gauge)
- UL Classified for a one hour wall
- Made in the USA



For Use in Penetration Firestop Systems  
SEE UL FIRE RESISTANCE DIRECTORY  
Control No: 25XC 1 Hour F Rating

US Patent 5,476,183 and 6,419,102

### General Information

#### Benefits:

- Locate the dryer right up against the wall
- Flex is protected from getting squished
- Lint build-up is minimized
- Efficiency is increased...clothes dry faster
- Dryer related service calls are almost eliminated
- Laundry room appears larger to prospects
- Reduces the fire hazard
- Socks and clothing can't fall behind appliance

#### Features:

- No trim-ring piece is needed
- Elbow eliminator...gain 5 foot of duct run
- Surface is paintable, no masking needed
- Applauded by Mechanical Inspectors
- Over 750,000 Dryerboxes installed